



ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	BEAM_OUTER-LEFT-14GA_r0	14 GA MAIN BEAM, OUTER UNIVERSAL	4
2	BEAM_INNER-14GA_r0	14GA MAIN BEAM, INNER	2
3	PIVOT SUNRANGER ST	10GA PIVOT PLATE - EAST	1
4	PIVOT SUNRANGER ST	10GA PIVOT PLATE - WEST	1
5	BASE SUNRANGER ST	10GA BASE BEAM - EAST	1
6	BASE SUNRANGER ST	10GA BASE BEAM - WEST	1
7	LEG SUNRANGER ST	10GA LEG - EAST	1
8	LEG SUNRANGER ST	10GA LEG - WEST	1
9	BRACE UPPER SUNRANGER ST	10GA ANGLE BRACE UPPER - EAST	1
10	BRACE UPPER SUNRANGER ST	10GA ANGLE BRACE UPPER - WEST	1
11	BRACES LOWER NE/SW SUNRANGER ST	10GA ANGLE BRACES LOWER - NE/SW	2
12	BRACES LOWER NW/SE SUNRANGER ST	10GA ANGLE BRACES LOWER - NW/SE	2
13	BRACES LOWER REINFORCEMENT SUNRANGER ST	10GA ANGLE BRACES LOWER REINFORCEMENT	2
14	UNIVERSAL BEAM FLANGE BRACE SUNRANGER ST 16L	16GA MAIN BEAM SPLICE - FLANGE BRACE	2
15	PURLIN	PURLIN - XL ST-16L (186" LG)	8
16	PURLIN TROUGH	12GA PURLIN REINFORCEMENT U-CHANNEL	16
17	LOWER_FRAME_WIRE-CABLE_XL	CROSS BRACE CABLE w/ TURNBUCKLE - 212 3/8"	2
18	UPPER_FRAME_WIRE-CABLE_SUNRANGER XL SHORT	TRUSS CABLE w/ TURNBUCKLE - 104 5/8"	2
19	UPPER_FRAME_WIRE-CABLE_SUNRANGER XL LONG	TRUSS CABLE w/ TURNBUCKLE - 126 1/4"	2
20	PILE SADDLE 12GA	12GA PILE SADDLE	4
21	3 NPS PILE	3" NPS HELICAL SCREW PILE	4
22	UBOLT 3 NPS	3" NPS U-BOLT	8

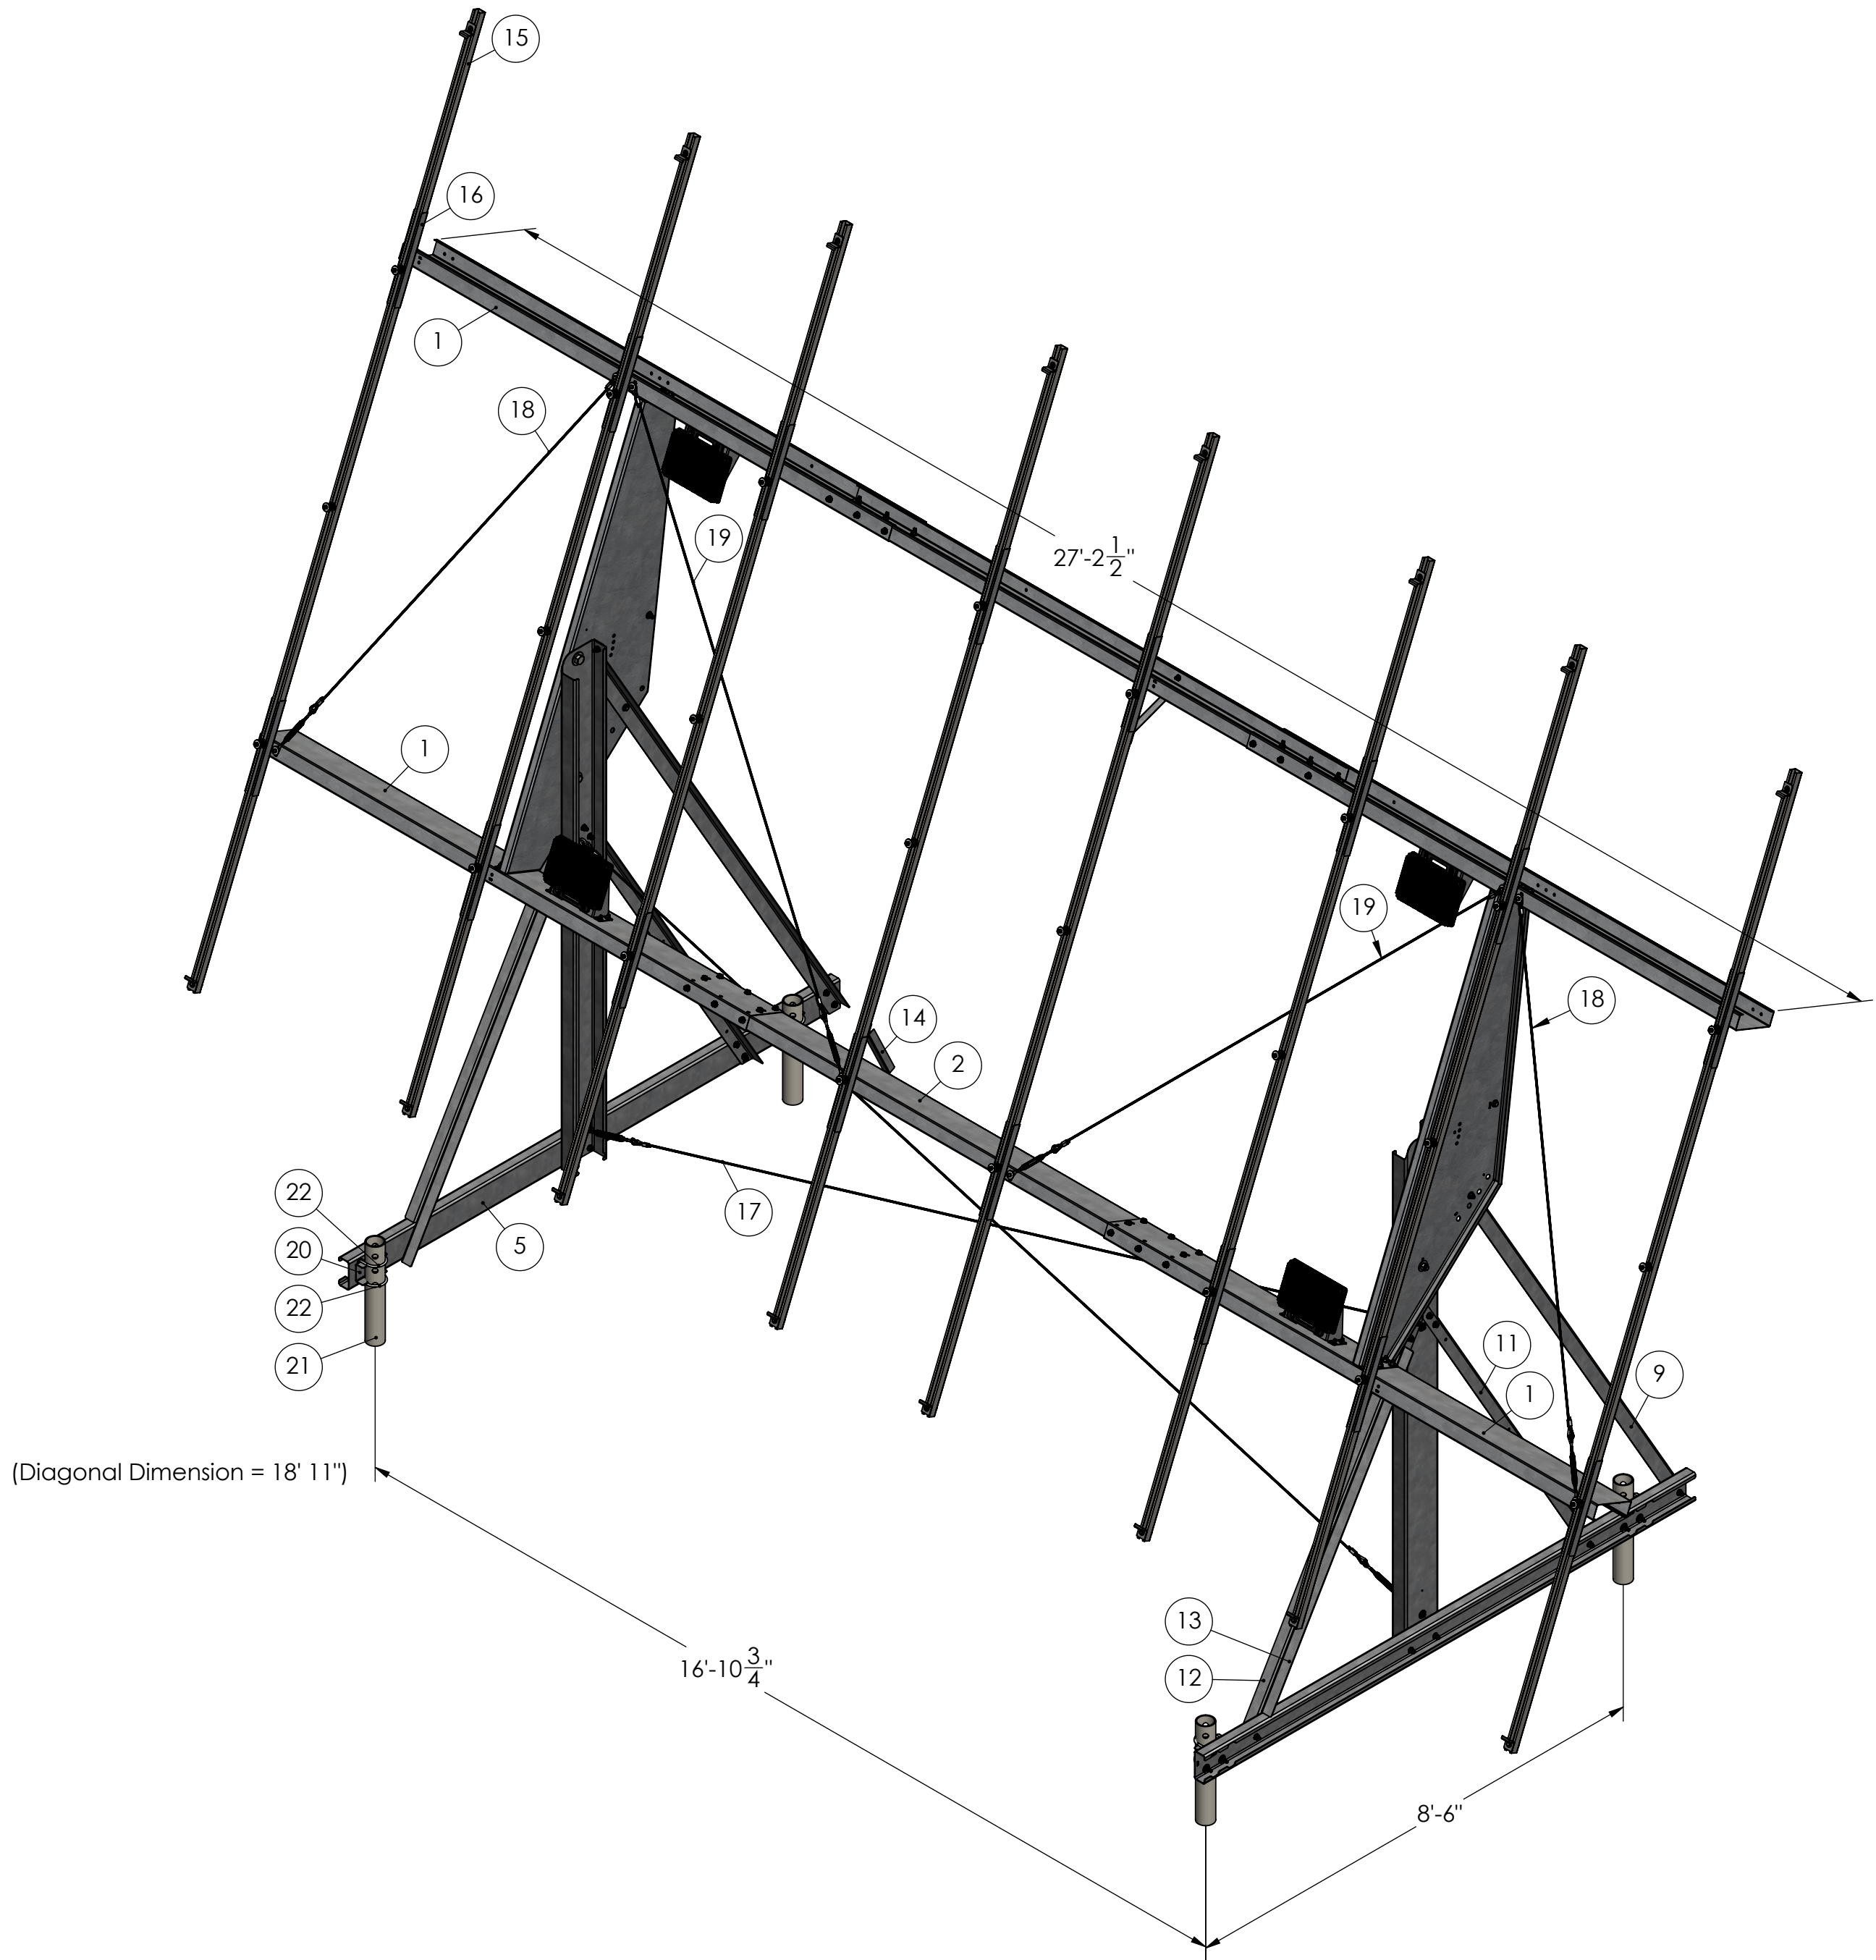


Isometric View
Scale 1:24

	1	2	3	4
1				
2				
3				
4				

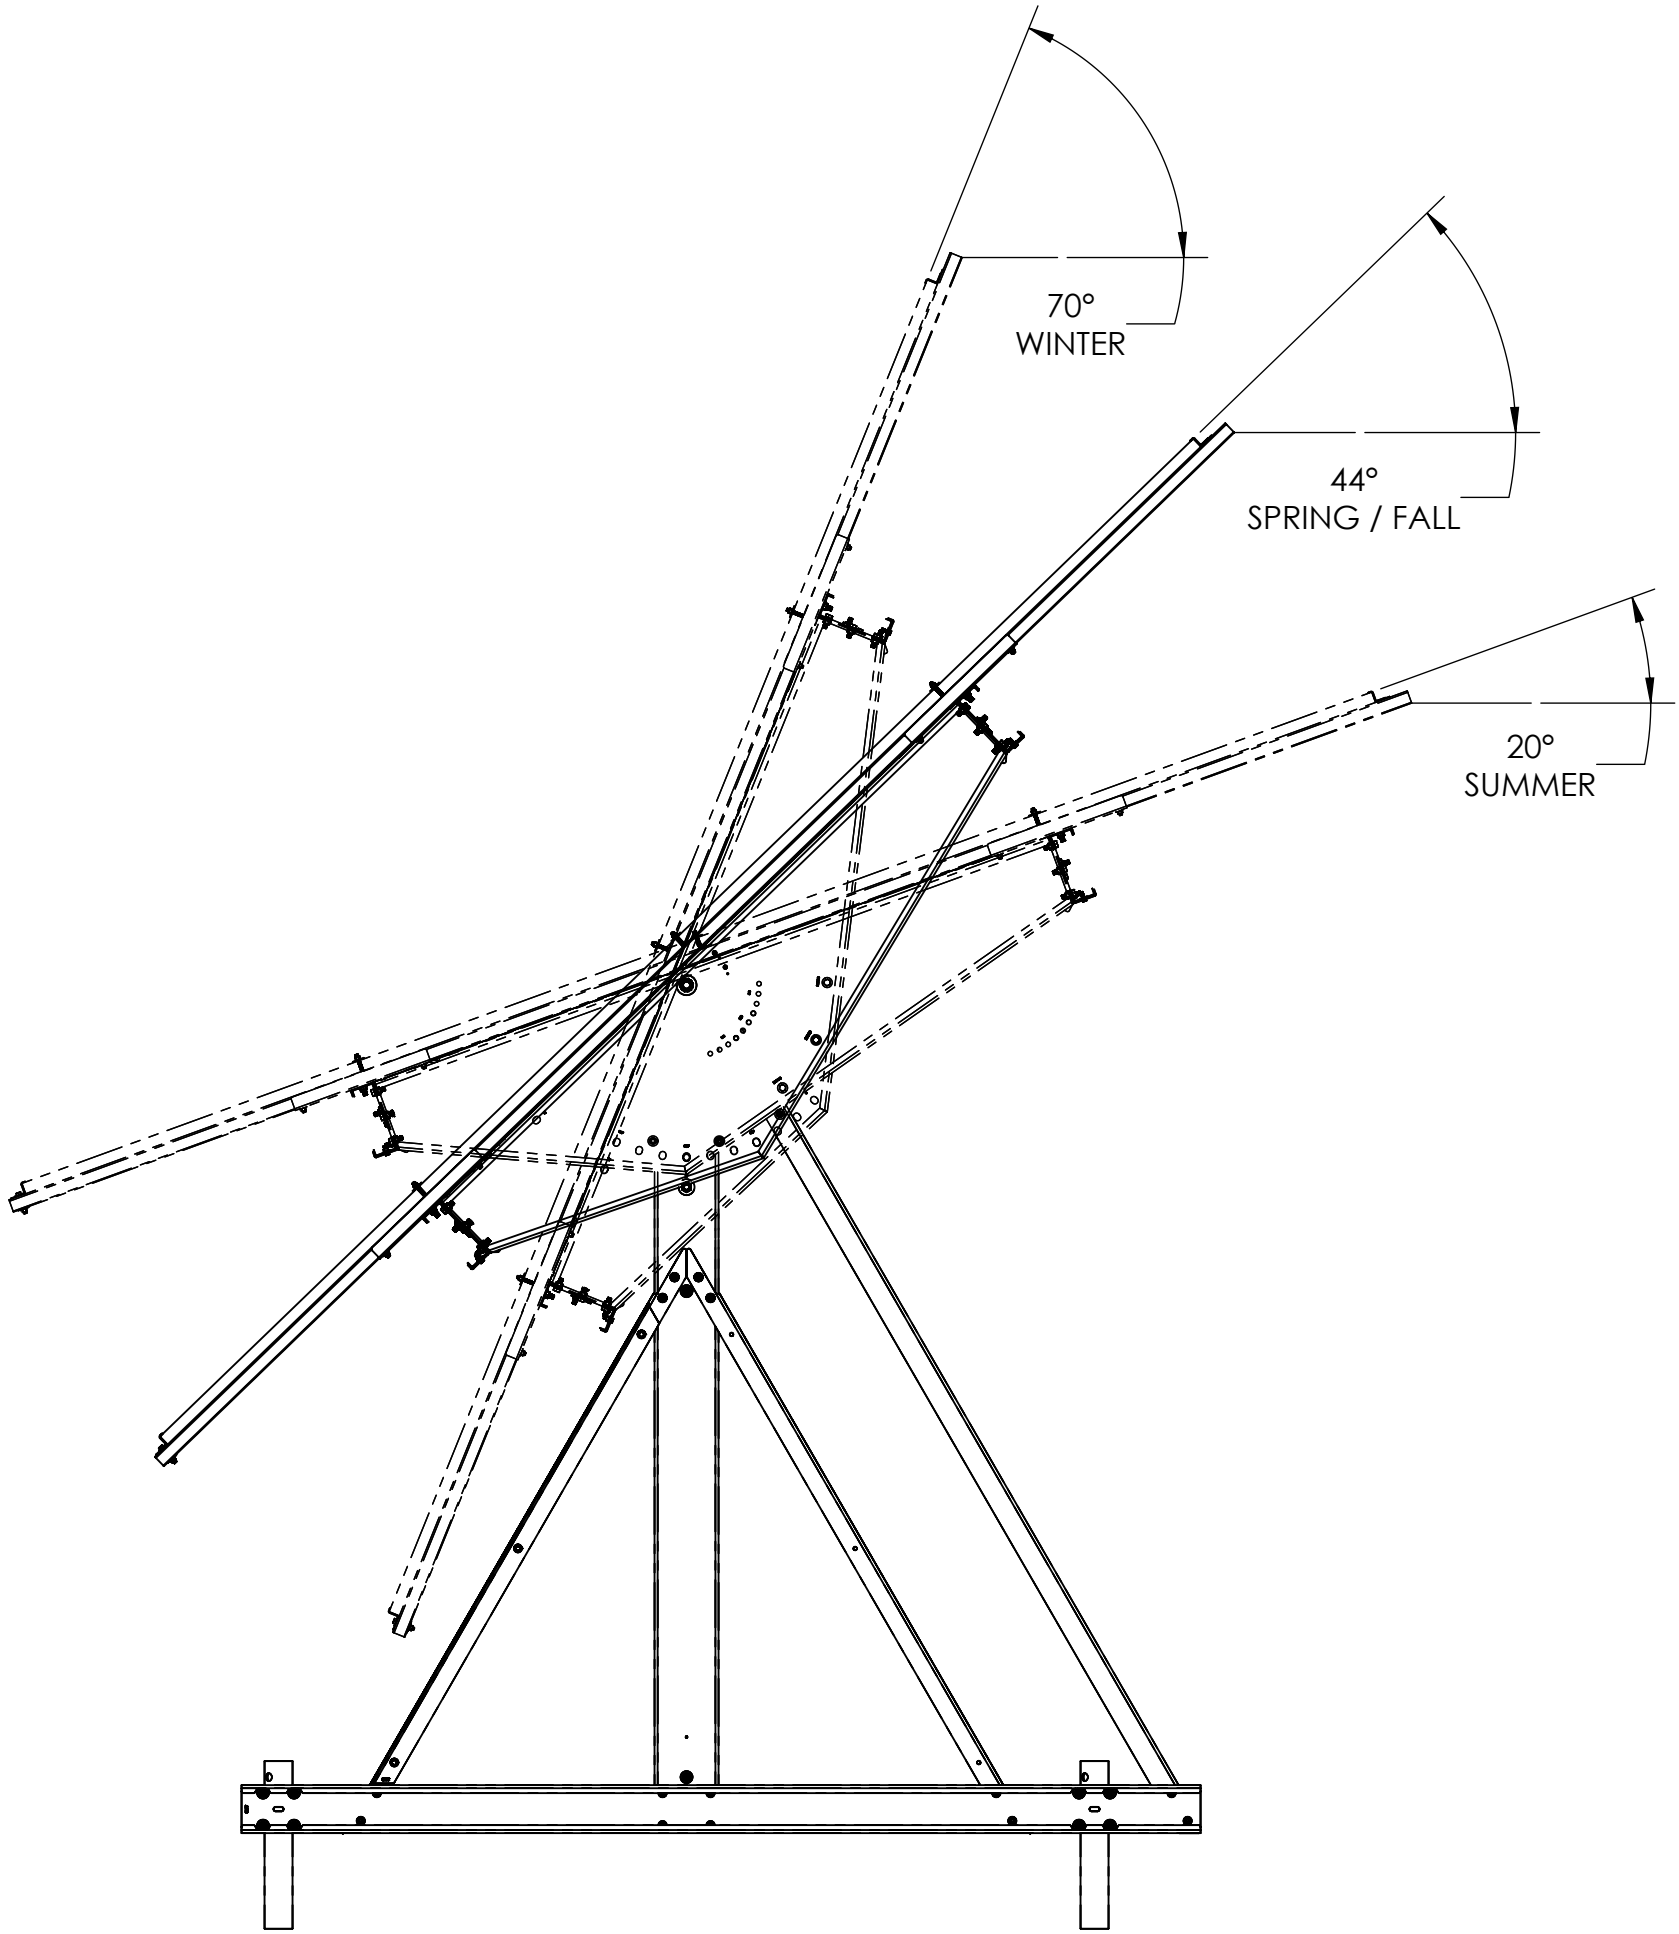

Right Elevation
Scale 1:24

MFG. TOLERANCES	© AZGARD SOLAR INC. ALL RIGHTS RESERVED		DRAWN BY:				AZGARD SOLAR INC. #2, 34-WRANGLER PLACE CALGARY, ALBERTA T1X 0L7 APEGA PERMIT#P09121		
FABRICATING	THIS DESIGN IS THE PROPERTY OF AZGARD SOLAR INC. THE INFORMATION AND KNOW-HOW HEREIN MAY NOT BE USED, NOR MAY THE DRAWINGS BE REPRODUCED, EXCEPT WITH THE WRITTEN PERMISSION OF AZGARD SOLAR INC. UNAUTHORIZED REPRODUCTION, IN WHOLE OR IN PART IS PROHIBITED		RWN						
CREATED DATE:									
May 8, 2025									
FRACTIONAL ± 1/8			Manufacturing Standard Notes:		WEIGHT:				ISSUE DATE:
DECIMAL ± .125	1. DE-BURR ALL PARTS 2. ALL THREADS TO BE CLASS 2A/2B UNLESS STATED OTHERWISE 3. CLEAN, DE-GREASE 4. FLAT PATTERNS ARE BASED ON A 0.46 K-FACTOR AND ARE REFERENCE ONLY 5. COLD-FORMED STEEL THICKNESS ± 10% AS PER S136 CODE		APPROVED BY:				SIZE: D		
ANGULAR ± 1°									
					DRAWING NO:		REV:		
				SunRanger ST-16XL-4P General Arrangement Drawing		SunRanger ST-16XL-4P_GA_r0		0	